

66/60/60



01d 'S'n 5995f

TERRELL C. BIRCH  
RAYMOND C. STEWART  
JOSEPH A. KOLASCH  
JAMES M. SLATTERY  
BERNARD L. SWEENEY\*  
MICHAEL K. MUTTER  
CHARLES GORENSTEIN  
GERALD M. MURPHY, JR.  
LEONARD R. SVENSSON  
TERRY L. CLARK  
ANDREW D. MEIKLE  
MARC S. WEINER  
JOE MCKINNEY MUNCY  
ROBERT J. KENNEY  
DONALD J. DALEY  
JOHN W. BAILEY  
JOHN A. CASTELLANO, III  
OF COUNSEL  
HERBERT M. BIRCH (1905-1996)  
ELLIOT A. GOLDBERG\*  
WILLIAM L. GATES\*  
EDWARD H. VALANCE  
RUPERT J. BRADY (RET.)\*

\*ADMITTED TO A BAR OTHER THAN VA

# BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD

SUITE 500 EAST

FALLS CHURCH, VA 22042-1210

USA

(703) 205-8000

FAX: (703) 205-8050

(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com

web: http://www.bskb.com

CALIFORNIA OFFICE

650 TOWN CENTER DRIVE, SUITE 1120

COSTA MESA, CA 92626-7125

(714) 708-8555

FAX: (714) 708-8565

GARY D. YACURA  
THOMAS S. AUCHTERLONIE  
MICHAEL R. CAMMARATA  
JAMES T. ELLER, JR.  
SCOTT L. LOWE  
MARY ANN CAPRIA  
MARK J. NUEL, PH.D.  
DARIN E. BARTHOLOMEW\*  
D. RICHARD ANDERSON  
PAUL C. LEWIS  
W. KARL RENNER

REG. PATENT AGENTS:  
FREDERICK R. HANDREN  
ANDREW J. TELESZ, JR.  
MARYANNE LIOTTA, PH.D.  
MAKI HATSUMI  
MIKE S. RYU  
CRAIG A. McROBBIE  
GARTH M. DAHLEN, PH.D.  
LAURA C. LUTZ  
ROBERT E. GOOZNER, PH.D.  
HYUNG N. SOHN  
MATTHEW J. LATTIG  
ALAN PEDERSEN-GILES

Date: September 9, 1999

Docket No.: 0905-0222P-SP

JC678 U.S. PRO  
09/392445  
09/09/99

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): MISAWA, Takeshi

For: DIGITAL ELECTRONIC STILL CAMERA AND REMOVABLE MEMORY CARD  
THEREFOR

Enclosed are:

X A specification consisting of 22 pages

X 8 sheet(s) of Formal drawings

X An assignment of the invention

X Certified copy of Priority Document(s)

X Executed Declaration X Original      Photocopy

     A verified statement to establish small entity status under 37  
CFR 1.9 and 37 CFR 1.27

     Preliminary Amendment

     Information Disclosure Statement, PTO-1449 and reference(s)

Other \_\_\_\_\_

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** \$760.00 *****	or	**** **** \$380.00 ****
TOTAL CLAIMS	10 - 20 =	0	x18 =\$ 0.00	or	x 9 = \$ 0.00
INDEPENDENT	2 - 3 =	0	x78 =\$ 0.00	or	x 39 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$ 0.00	or	+130 = \$ 0.00
TOTAL \$ 760.00				TOTAL \$ 0.00	

X A check in the amount of \$ 800.00 to cover the filing fee and recording fee (if applicable) is enclosed.

\_\_\_\_\_ Please charge Deposit Account No. 02-2448 in the amount of \$ \_\_\_\_\_. A triplicate copy of this transmittal form is enclosed.

\_\_\_\_\_ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By \_\_\_\_\_

MICHAEL K. MUTTER

Reg. No. 29,680

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000  
MKM/d11

SPECIFICATION

TITLE OF THE INVENTION

DIGITAL ELECTRONIC STILL CAMERA AND REMOVABLE MEMORY

CARD THEREFOR

5                   BACKGROUND OF THE INVENTION

Field of the Invention

          This invention relates to a memory card (inclusive  
of media referred to as memory cartridges and digital  
film) for storing image data, and to a digital  
10   electronic still camera into which such a memory card  
can be removably inserted.

Description of the Related Art

          Internal semiconductor memories, removable memory  
cards and the like are used as the storage media of  
15   digital electronic still cameras. Image data obtained  
by sensing the image of a subject using a digital  
electronic still camera is stored on storage media such  
as the internal semiconductor memory or memory card.  
Because they are easy to access, memory cards are used  
20   as the storage media of digital electronic still cameras  
comparatively frequently.

SUMMARY OF THE INVENTION

          Once image data has been stored on a memory card,  
the content of the image data cannot be ascertained  
25   unless the image data is read out of the card. It has  
been contemplated, therefore, to provide the memory card  
with a display device to display an image. Providing a  
memory card with a display device, however, makes it

difficult to produce a thin card.

Accordingly, an object of the present invention is to make it possible to obtain a comparatively thin memory card even if the card is provided with a display  
5 device.

Another object of the present invention is to provide a digital electronic still camera into which such a memory card can be removably inserted.

A memory card in accordance with the present  
10 invention is capable for being removably inserted into an image processing apparatus which outputs image data representing an image, the memory card having an image memory for storing image data, which is output from the image processing apparatus, applied thereto as an input,  
15 and a liquid crystal display device for displaying an image represented by the image data that has been stored in the image memory, wherein the memory card has a case which is open at a location corresponding to a back side of the liquid crystal display device, and the liquid  
20 crystal display device is a transmission-type liquid crystal panel for displaying an image.

The memory card preferably further includes a diffusion plate for diffusing light and illuminating the back side of the transmission-type liquid crystal panel  
25 with the diffused light.

In the memory card according to the present invention, a light source for backlighting the transmission-type liquid crystal panel is not provided.

Since there is no light source for backlighting, the memory card can be reduced in thickness.

When an image is viewed by being displayed on the transmission-type liquid crystal panel of the memory card, the memory card is held in one's hand and illuminated by artificial light such as a lamp or by natural light such as sunlight.

A digital electronic still camera having a light source for illuminating the transmission-type liquid crystal panel with light from its back side may be constructed, and it may be so arranged that the above-described memory card is inserted into the camera. An image displayed on the transmission-type liquid crystal panel of the memory card can be viewed using the light source with which the camera is equipped.

The memory card may further be provided with a power supply for displaying an image on the liquid crystal display device, an insertion detection device for detecting whether the memory card has been connected to the image processing apparatus by insertion therein, and a power-supply controller for turning the power supply on or off in response to detection of insertion of the memory card into the image processing apparatus by the insertion detection device.

When power is supplied to the memory card by the image processing apparatus as a result of detection of insertion of the memory card into the image processing apparatus, the power supply incorporated within the

memory card is turned off. This makes it possible to suppress consumption of power by the memory card.

In a case where the image processing apparatus is a digital electronic still camera and the transmission-  
5 type liquid crystal panel of the memory card is exposed to the exterior of the camera, the power supply of the memory card is turned on by the image processing apparatus as a result of detection of insertion of the card into the image processing apparatus. Merely  
10 inserting the memory card into the image processing apparatus results in display of an image represented by the image data that has been stored on the memory card.

In this case, and by way of example, the digital electronic still camera would be provided with a memory-  
15 card insertion detection device for detecting whether the memory card has been inserted into the camera, and a command controller for applying to the memory card a command for turning the power supply on or off in response to detection of insertion of the memory card by  
20 the memory-card insertion detection device.

Thus, in response to a command output from the digital electronic still camera, control is performed to turn the power supply of the memory card on or off.

The memory card may be provided with a command  
25 input device for inputting a power-on command applied by the image processing apparatus, a power-on controller turning the power supply on in response to input of the power-on command from the command input device.

Thus, the power supply of the memory card can be turned on or off under the control of the image processing apparatus.

The memory card may further be provided with a charging circuit, which is supplied with a voltage from the image processing apparatus in response to detection of insertion of the memory card into the image processing apparatus by the insertion detection device, for charging the power supply by this supplied voltage.

Even if memory card power runs low, therefore, storage of image data in the memory card can continue because the power supply of the memory card is charged.

By way of example, the above-described digital electronic still camera would be provided with a memory-card insertion detection device for detecting whether the memory card has been inserted into the camera, and a charging controller for charging the power supply in response to detection of insertion of the memory card by the memory-card insertion detection device.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1 and 2 are perspective views of a memory card according to an embodiment of the present

invention;

Fig. 3 is a sectional view of the memory card;

Fig. 4 shows the manner in which an image being displayed on the memory card is viewed;

5 Figs. 5 and 6 are perspective views of a digital electronic still camera according to an embodiment of the present invention;

Fig. 7 is a sectional view of the camera taken along line VII-VII of Fig. 6;

10 Fig. 8 is a block diagram showing the electrical construction of the memory card;

Fig. 9 is a block diagram showing the electrical construction of the digital electronic still camera; and

15 Fig. 10 is a sectional of a memory card according to another embodiment of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figs. 1 and 2 are perspective views of a memory card according to an embodiment of the present invention.

20 A memory card 1 is capable for being removably inserted into a digital electronic still camera (referred to also as a "digital camera" below). Image data obtained by sensing the image of a subject using the digital camera is recorded on the memory card.

25 A liquid crystal display device 2 has a display screen exposed to view on the front side of the memory card 1 substantially over its entire area. Power-supply control switches 3 for controlling the memory card 1 to



turn the card on and off are provided at the right side  
of the liquid crystal display device 2. The power-  
supply control switches 3 include a switch for turning  
the power supply on and a switch for turning the power  
5 supply off.

Next-frame and previous-frame switches 4, 5,  
respectively, are provided below the power-supply  
control switches 3. An image display switch 6 and a  
memory-information display switch 7 are provided below  
10 the previous-frame switch 5. A connection terminal 8  
for electrically connecting the memory card 1 and the  
digital camera is formed on the right side end of the  
memory card 1.

An image represented by image data that has been  
15 stored on the memory card 1 can be displayed on the  
liquid crystal display device 2, as shown in Fig. 1.

The image represented by the image data that has  
been stored on the memory card 1 is displayed on the  
display screen of the liquid crystal display device 2 by  
20 closing the ON switch of the power-supply control  
switches 3 of the memory card 1. (For example, the  
image represented by the image data stored on the memory  
card 1 last is displayed. It is of course permissible  
to display the image represented by the image data  
25 stored first, or to display some other image.) By  
pressing the next-frame switch 4, the image of the frame  
that follows the image being displayed on the liquid  
crystal display device 2 is displayed on the liquid

crystal display device 2. By pressing the previous-frame switch 5, the image of the frame preceding the image being displayed on the liquid crystal display device 2 is displayed on the liquid crystal display device 2. The image number is also displayed on the liquid crystal display device 2.

By pressing the memory-information display switch 7, information regarding a semiconductor memory incorporated in the memory card 1 is displayed on the liquid crystal display device 2, as shown in Fig. 2. In the example of Fig. 2, the remaining number of images that can be stored on the memory card 1 and the amount of remaining battery capacity are being displayed on the liquid crystal display device 2.

By pressing the image display switch 6, an image is displayed on the liquid crystal display device 2 again, as shown in Fig. 1.

Fig. 3 is a cross-sectional view of the memory card 1. Hatching is deleted in order to facilitate understanding of the card.

The liquid crystal display device 2 uses a transmission-type liquid crystal panel 11. The front side of the transmission-type liquid crystal panel 11 is provided with a surface-protecting glass 10 for protecting the transmission-type liquid crystal panel 11. The back side of the transmission-type liquid crystal panel 11 is provided with a white diffusing plate 12 for diffusing light and applying the diffused

light to the back side of the transmission-type liquid crystal panel 11. The surface-protecting glass 10, transmission-type liquid crystal panel 11 and white diffusing plate 12 construct the liquid crystal display device 2 and are fixedly accommodated by a case 9 of the memory card 1.

The liquid crystal display device 2 is not provided with a light source for backlighting. The front and back sides of the case 9 of the memory card 1 at the location where the liquid crystal display device 2 is provided are open, with the back side of the white diffusing plate 12 being exposed externally of the memory card 1.

Fig. 4 illustrates the manner in which an image displayed on the display screen of the liquid crystal display device 2 of the memory card 1 is viewed.

As mentioned above, the liquid crystal display device 2 utilizes the transmission-type liquid crystal panel 11 and is not provided with a light source for backlighting. When the image being displayed on the liquid crystal display device 2 is viewed, therefore, the memory card 1 is held with the back side of the transmission-type liquid crystal panel 11 faced toward the sun (or illumination). The light from the sun (or the light from the illumination) is diffused by the white diffusing plate 12 and uniformly illuminates the back side of the transmission-type liquid crystal panel 11. Thus, even though the memory card 1 does not have a

light source for backlighting, the image being displayed on the liquid crystal display device 2 can be viewed.

In the example set forth above, the liquid crystal display device 2 of the memory card 1 includes the white diffusing plate 12. However, the white diffusing plate 12 need not necessarily be provided.

Figs. 5 and 6 illustrate a digital electronic still camera 30 into which the memory card 1 is capable for being removably inserted. Fig. 5 is a perspective view as seen from the front, and Fig. 6 is a perspective view as seen from that rear.

As shown in Fig. 5, the top of the digital camera 30 is formed to have a shutter button 31 on the left side thereof and a power-supply switch 33 on the right side thereof. The power-supply switch 33 is for controlling the digital camera 30 so as to turn its power supply on and off.

A taking lens 35 is exposed substantially at the center of the digital camera 30 on the front side thereof. An optical viewfinder 32 and a strobe 34 are provided above the taking lens 35.

A slot 36 for inserting the memory card 1 is provided in the right side of the digital camera 30.

As shown in Fig. 6, a window 37 is formed in the back side of the digital camera 30 at the lower left. When the memory card 1 is inserted from the slot 36 formed in the side of the digital camera 30, the liquid crystal display device 2 of the memory card 1 is exposed

from the window 37 of the digital camera 30. With the memory card 1 inserted into the digital camera 30, an image being displayed on the liquid crystal display device 2 of the memory card 1 can be viewed.

5        Fig. 7 is a sectional view taken along line VII-VII of Fig. 6. Hatching is deleted in Fig. 7.

10        The digital camera 30 includes a light source 38 for backlighting. When the memory card 1 has been inserted into the digital camera 30, the light source 38 illuminates the back side of the white diffusing plate 12 constructing the liquid crystal display device 2 of the memory card 1. A reflecting plate 39 is provided in order to introduce the light emission from the light source 38 to the back side of the white diffusing plate 15 12 in an efficient manner.

20        The liquid crystal display device 2 of the memory card 1 does not include a light source for backlighting. However, when the memory card 1 has been inserted into the digital camera 30, the transmission-type liquid crystal panel 11 is illuminated (with light L) by the light source 38 provided for backlighting in the digital camera 30. With the memory card 1 inserted into the digital camera 30, therefore, an image displayed on the liquid crystal display device 2 of the memory card 1 can 25 be seen.

      Fig. 8 is a block diagram showing the electrical construction of the memory card 1, and Fig. 9 is a block diagram showing the electrical construction of the

digital camera.

The overall operation of the memory card 1 is supervised by a CPU 20. Signals representing the settings of operating keys (the above-mentioned power-supply control switches 3, next-frame switch 4, previous-frame switch 5, image display switch 6 and memory-information display switch 7) 21 are input to the CPU 20.

A removable battery (charging battery) 25 has been loaded in the memory card 1. The battery 25 supplies power to each circuit constructing the memory card 1. The voltage of the battery 25 is sensed by a power-supply control circuit 26. The remaining capacity of the battery is calculated by the CPU 20 based upon the voltage sensed and the calculated capacity is displayed on the liquid crystal display device 2. The battery 25 is charged by the power-supply control circuit 26.

The memory card 1 includes a semiconductor memory 22 for storing image data. The readout of data from and the writing of data to the semiconductor memory 22 is controlled by a memory controller 23. The image data that has been stored in the semiconductor memory 22 is read out by the memory controller 23 and applied to the liquid crystal display device 2, whereby an image is displayed on the liquid crystal display device 2.

Also stored in the semiconductor memory 22 is data representing the memory capacity of the semiconductor memory 22, the amount of memory already being used and

the amount of remaining memory in which data is capable for being stored. The amount of data in image data representing one frame of an image is predetermined, and the number of pictures that can be taken is calculated  
5 by the CPU 20 based upon the amount of memory remaining. The number calculated is displayed on the liquid crystal display device 2, as shown in Fig. 2.

The memory card 1 includes a PC-card connector 24. The memory card 1 and digital camera 30 are electrically  
10 connected by the connector 24 via the connection terminal 8.

The memory card 1 may be provided with an insertion detection circuit 27 for detecting that the card has been inserted into the digital camera 30. The power  
15 supply of the memory card can be controlled so as to be turned on and off by detecting, through the insertion detection circuit 27, that the card has been inserted into the digital camera 30. By turning on the power supply of the memory card 1 through such control when  
20 the memory card 1 is inserted into the digital camera 30, an image can be displayed merely by the insertion of the memory card 1 into the digital camera 30.

Conversely, by turning off the power supply of the memory card 1 through such control when the memory card  
25 1 is inserted into the digital camera 30, consumption of the battery 25 can be suppressed. In such case the power would be supplied to the memory card 1 from the digital camera 30.

With reference to Fig. 9, the overall operation of the digital camera 30 is supervised by the CPU 40.

The digital camera 30 includes a power supply 49 by which each of the circuits of the digital camera 30 are  
5 supplied with power.

The taking lens 35 is driven by a lens driving circuit 46 so that the image of a subject is formed on the light-receiving surface of an image sensing device 44. A shutter and diaphragm (neither of which are  
10 shown) are driven by a shutter/diaphragm driving circuit 45 to control shutter speed and aperture.

When the image of a subject is sensed by the image sensing device 44, the latter outputs a video signal representing the image of the subject. The video signal  
15 is input to an analog/digital conversion circuit 43, whereby the signal is converted to digital image data. The digital image data is applied to a digital-signal processing circuit 42, which subjects the digital image data to signal processing such as a color balance  
20 correction and gamma correction.

The signal output by the digital-signal processing circuit 42 is applied to the memory card 1, which has been connected the PC-card connector 41, and is input to the semiconductor memory 22 so as to be stored there.  
25 By reading the image data out of the semiconductor memory 22, the image of the subject obtained by photography can be displayed on the display screen of the liquid crystal display device 2 of the memory card



1.

The digital camera 30 is provided with a card-  
insertion detection circuit 47 for detecting that the  
memory card 1 has been inserted. If insertion of the  
5 memory card 1 into the digital camera 30 is detected by  
the card-insertion detection circuit 47, each circuit of  
the memory card 1 is supplied with the voltage of the  
power supply 49 included in the digital camera 30. The  
power supply of the memory card 1 is controlled so as to  
10 be turned off, and the supply of power from the battery  
25 loaded in the memory card 1 is controlled by the  
power-supply control circuit 26 in such a manner that  
supply is stopped. This makes it possible to suppress  
needless consumption of the battery 25 loaded in memory  
15 card 1.

An arrangement may be adopted in which the power  
supply of the memory card 1 is turned on when insertion  
of the memory card 1 into the digital camera 30 has been  
detected by the card-insertion detection circuit 47.  
20 When the memory card 1 is inserted into the digital  
camera 30, an image would be displayed on the liquid  
crystal display device 2 of the memory card 1 so that  
the image could be viewed.

Further, an arrangement may be adopted in which the  
25 digital camera 30 is provided with various operating  
keys 50. A signal representing setting of the operating  
keys 50 enters the CPU 40. It is also possible to adopt  
an arrangement in which the power supply of the memory

card 1 is controlled so as to be turned on and off using the operating keys 50. It goes without saying that in a case where the power supply of the memory card 1 is on/off controlled, a signal for controlling the on/off state of the power supply would be input to the CPU 20 of the memory card 1 from the digital camera 30.

Further, an arrangement may be adopted in which operating the operating keys 50 of the digital camera 30 applies the voltage from the power supply 49 of the digital camera 30 to the battery 25 loaded in the memory card 1, thereby charging the battery 25.

The image data that has been stored in the memory card 1 can be erased by operating the operating keys 50.

Fig. 10 illustrates another embodiment of the present invention and is a sectional view of a memory card 1a. No hatching is shown in Fig. 10.

Whereas the memory card 1 of the foregoing embodiment uses the transmission-type liquid crystal panel 11, as shown in Fig. 3, the memory card 1a illustrated in Fig. 10 employs a reflection-type liquid crystal panel 61. A reflecting plate 63 is secured to the back side of the reflection-type liquid crystal panel 61 via a white diffusing plate 62. The back side of the reflecting plate 63 is closed by a case 64 of the memory card 1a.

Light that has entered the reflection-type liquid crystal panel 61 from the front side thereof via the surface-protecting glass 10 is diffused by the white

diffusing plate 62 via the reflection-type liquid  
crystal panel 61 and illuminates the reflecting plate  
63. This light is reflected by the reflecting plate 63.  
As a result, an image displayed on the reflection-type  
5 liquid crystal panel 61 can be viewed.

As many apparently widely different embodiments of  
the present invention can be made without departing from  
the spirit and scope thereof, it is to be understood  
that the invention is not limited to the specific  
10 embodiments thereof except as defined in the appended  
claims.

WHAT IS CLAIMED IS:

1. A digital electronic still camera into which a memory card is removably inserted, said memory card including an image memory for storing image data  
5 representing an image, a transmission-type liquid crystal panel for displaying an image represented by the image data that has been stored in said image memory, and a case for accommodating said image memory and said liquid crystal panel, said case having an opening at a  
10 location corresponding to a back side of said transmission-type liquid crystal panel;

said camera having a light source for illuminating said transmission-type liquid crystal panel from its back side.

- 15 2. The camera according to claim 1, wherein said memory card has a power supply for driving said liquid crystal panel, and said camera further includes:

a memory-card insertion detection device for detecting whether said memory card has been inserted  
20 into said camera; and

a command controller for applying to said memory card a command for controlling said memory card to turn the power supply on or off in response to detection of insertion of said memory card by said memory-card  
25 insertion detection device.

3. The camera according to claim 1, wherein said memory card has a chargeable power supply for driving said liquid crystal panel, and said camera further includes:

a memory-card insertion detection device for detecting whether said memory card has been inserted into said camera; and

a charging controller for performing control so as  
5 to charge said power supply in response to detection of insertion of said memory card by said memory-card insertion detection device.

4. A memory card removably inserted into an image processing apparatus which outputs image data  
10 representing an image, comprising:

an image memory for storing image data, which is output from the image processing apparatus, applied thereto as an input;

a liquid crystal display device for displaying an  
15 image represented by the image data that has been stored in said image memory; and

a case for accommodating said image memory and said liquid crystal display device, said case having an opening at a location corresponding to a back side of  
20 said liquid crystal display device;

said liquid crystal display device being a transmission-type liquid crystal panel.

5. The memory card according to claim 4, further comprising a diffusion plate for diffusing light and  
25 illuminating the back side of said transmission-type liquid crystal panel with the diffused light.

6. The memory card according to claim 4, further comprising:

a power supply for displaying an image on said liquid crystal display device;

an insertion detecting device for detecting whether said memory card has been connected to the image processing apparatus by being inserted therein; and

a power-off control device for turning said power supply off in response to detection of insertion of said memory card into the image processing apparatus by said insertion detection device.

7. The memory card according to claim 4, further comprising:

a power supply for displaying an image on said liquid crystal display device;

an insertion detecting device for detecting whether said memory card has been connected to the image processing apparatus by being inserted therein; and

a power-on controller for turning said power supply on in response to detection of insertion of said memory card into the image processing apparatus by said insertion detection device.

8. The memory card according to claim 7, further comprising a command input device for inputting a power-on command provided by the image processing apparatus;

said power-on controller turning said power supply on in response to input of the power-on command from said command input device.

9. The memory card according to claim 6, further comprising a charging circuit, which is supplied with a

voltage from the image processing apparatus in response to detection of insertion of said memory card into the image processing apparatus by said insertion detection device, for charging said power supply by this supplied  
5 voltage.



10. The memory card according to claim 7, further comprising a charging circuit, which is supplied with a voltage from the image processing apparatus in response to detection of insertion of said memory card into the  
10 image processing apparatus by said insertion detection device, for charging said power supply by this supplied voltage.


DocId: 34466666


ABSTRACT OF THE DISCLOSURE

A memory card having a liquid crystal display device is reduced in thickness. To this end, the back side of a liquid crystal display panel is provided with  
5 a white diffusing plate and the memory card is not provided with a light source for backlighting. A digital electronic still camera , into which the memory card is removably inserted, is provided with a light source for backlighting. When the memory card has been  
10 inserted into the digital camera, the transmission-type liquid crystal panel is illuminated using the light source of the camera. Thus an image displayed on the liquid crystal display device of the memory card can be viewed even though the memory card does not have a light  
15 source for backlighting.

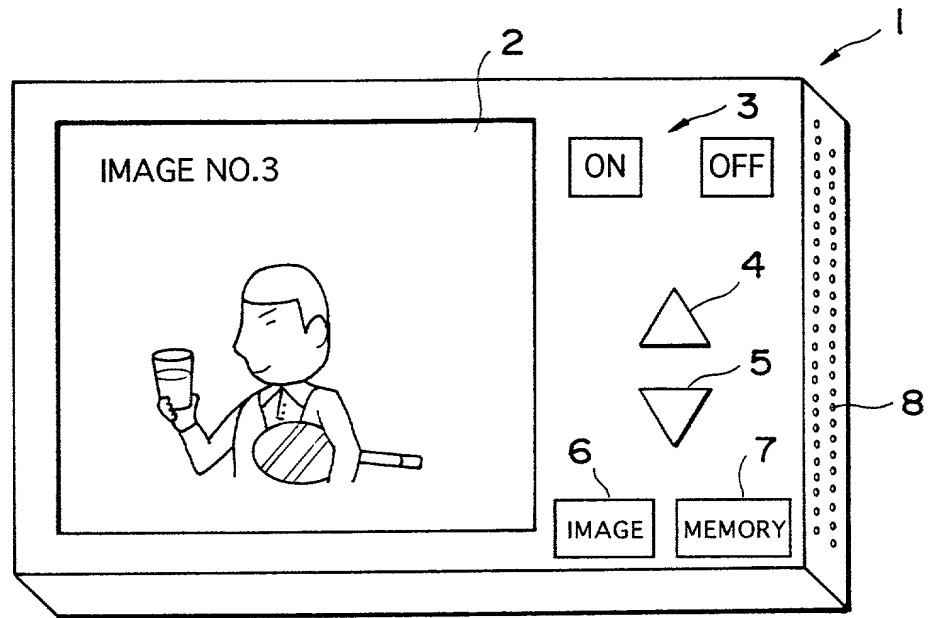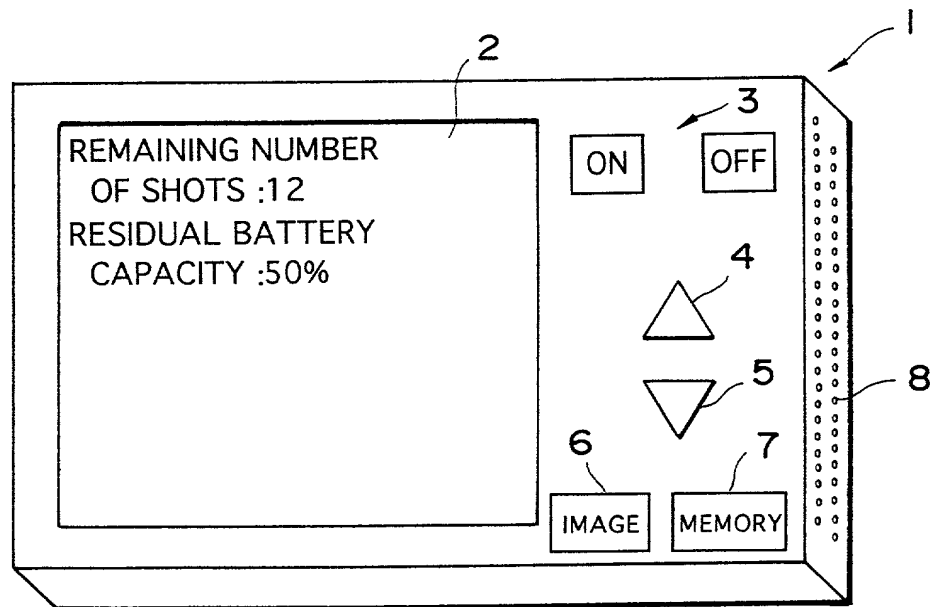


*Fig. 1**Fig. 2*

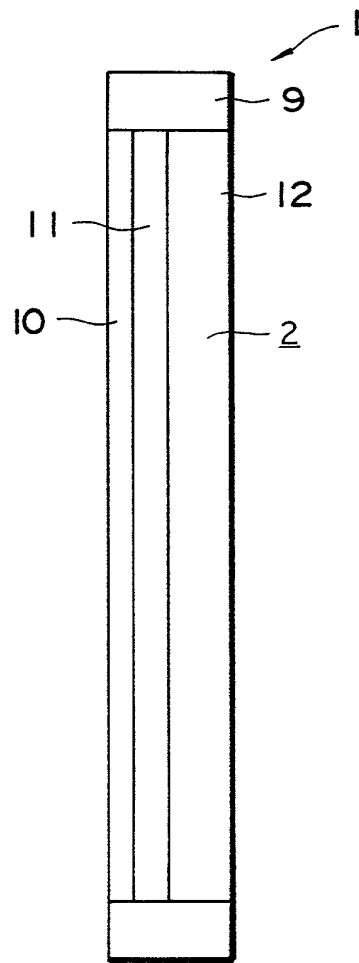
*Fig. 3*

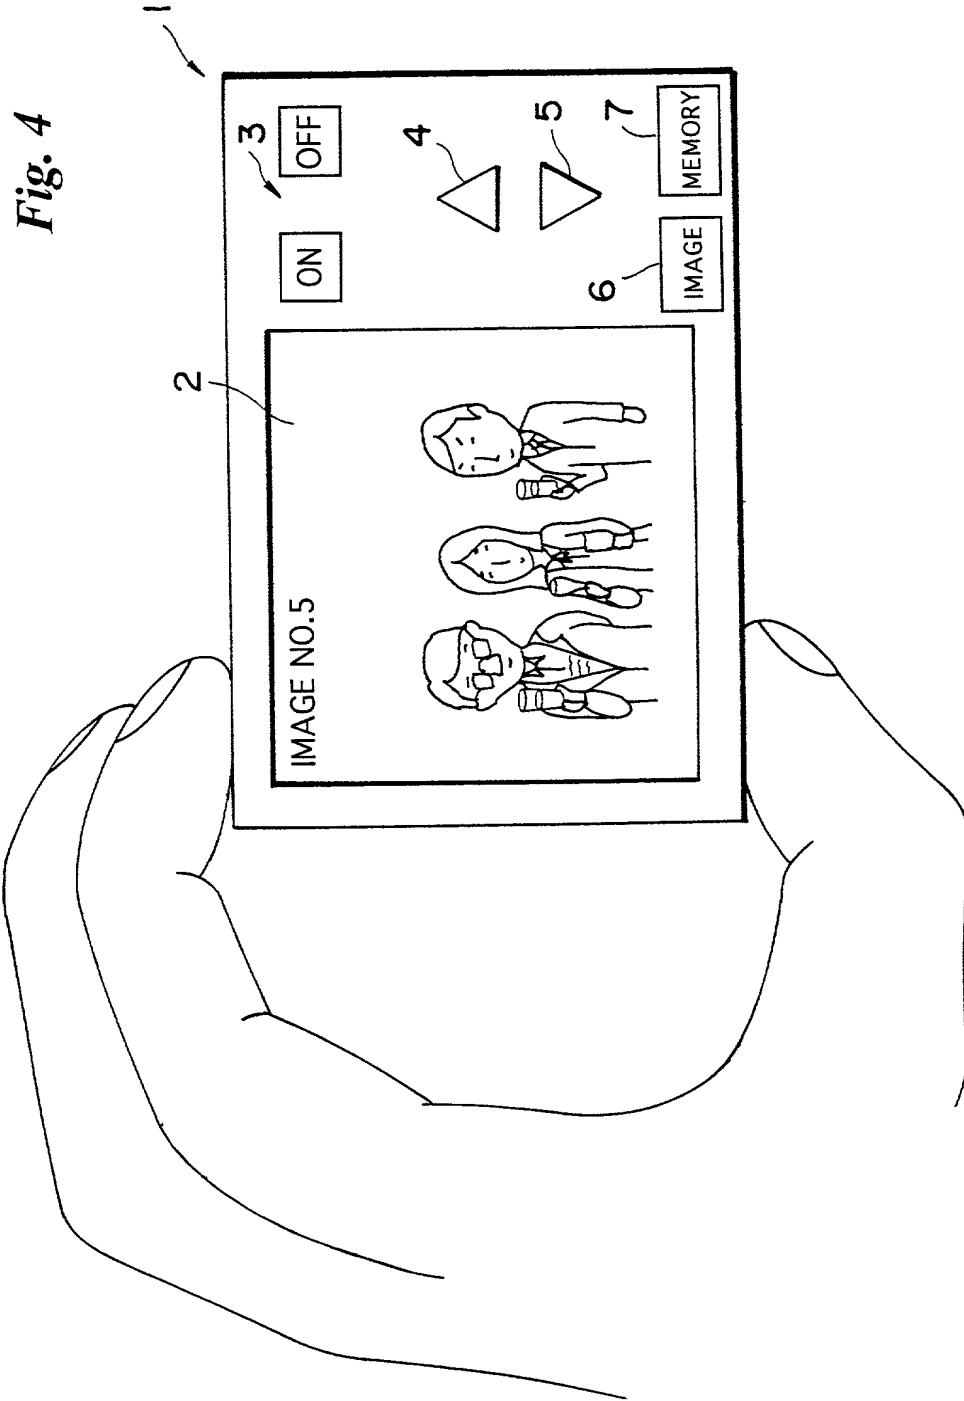


**Fig. 5**

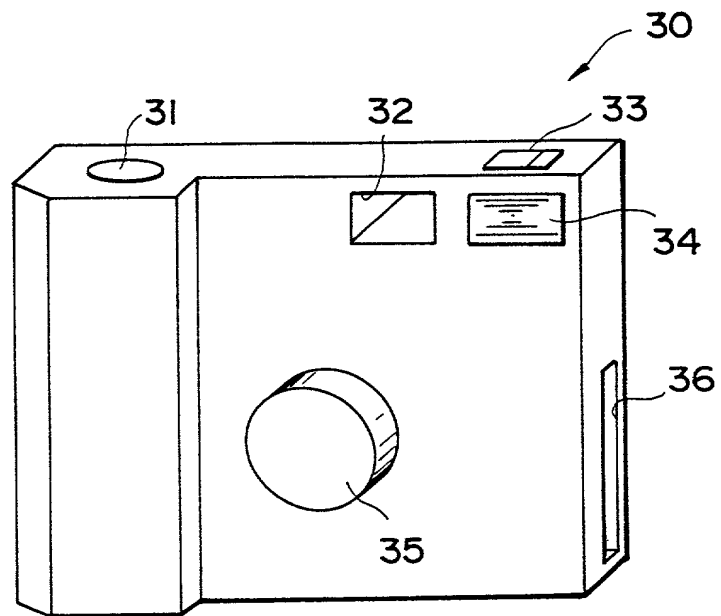


**Fig. 6**

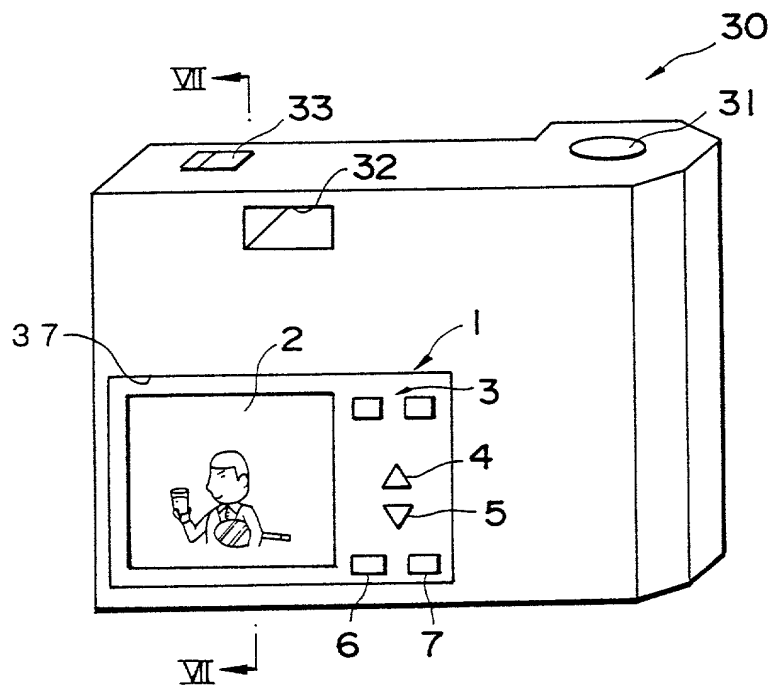

**Fig. 7**

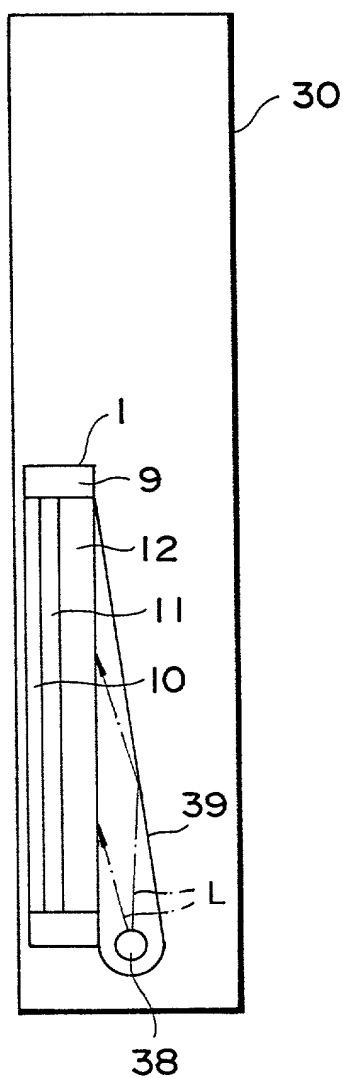

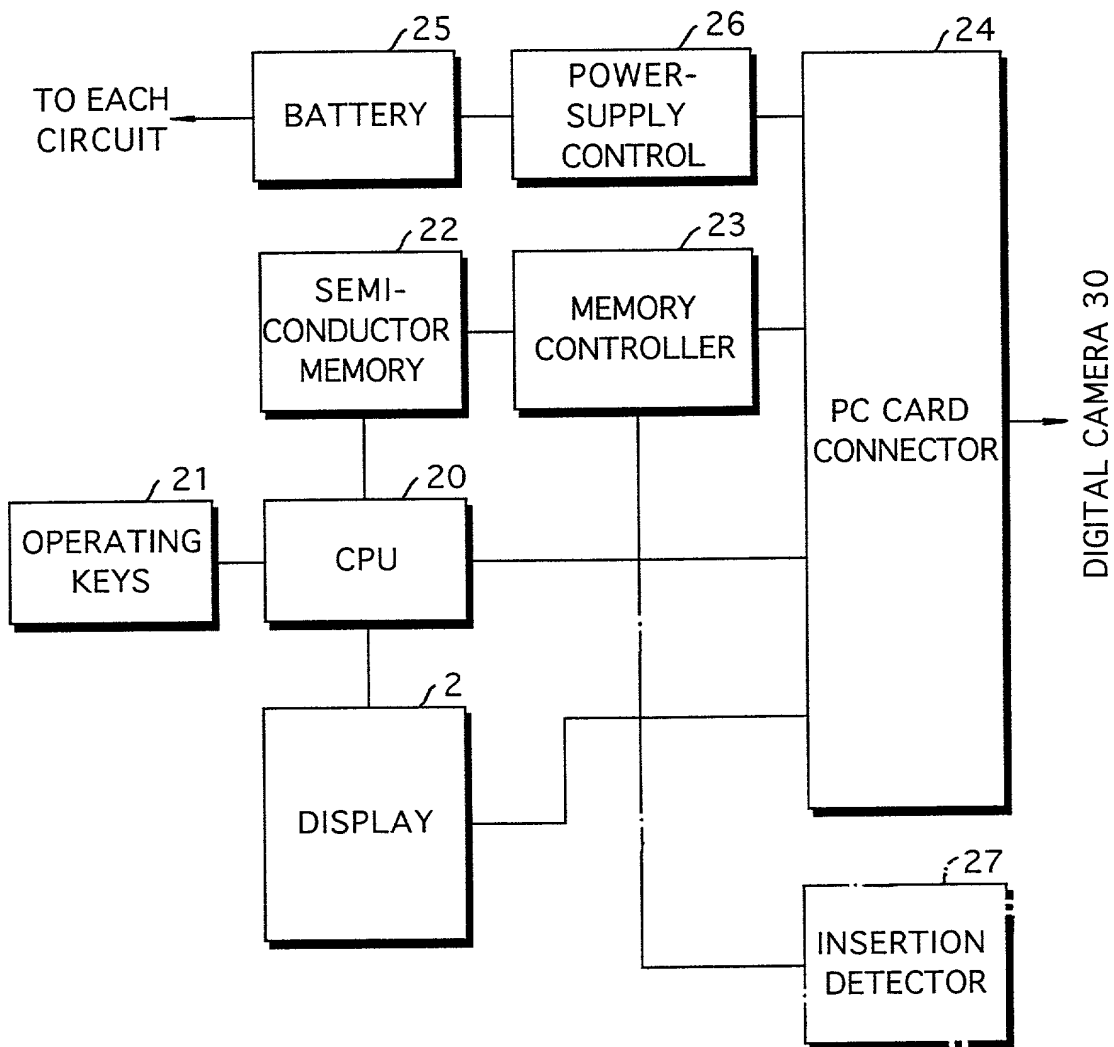*Fig. 8*


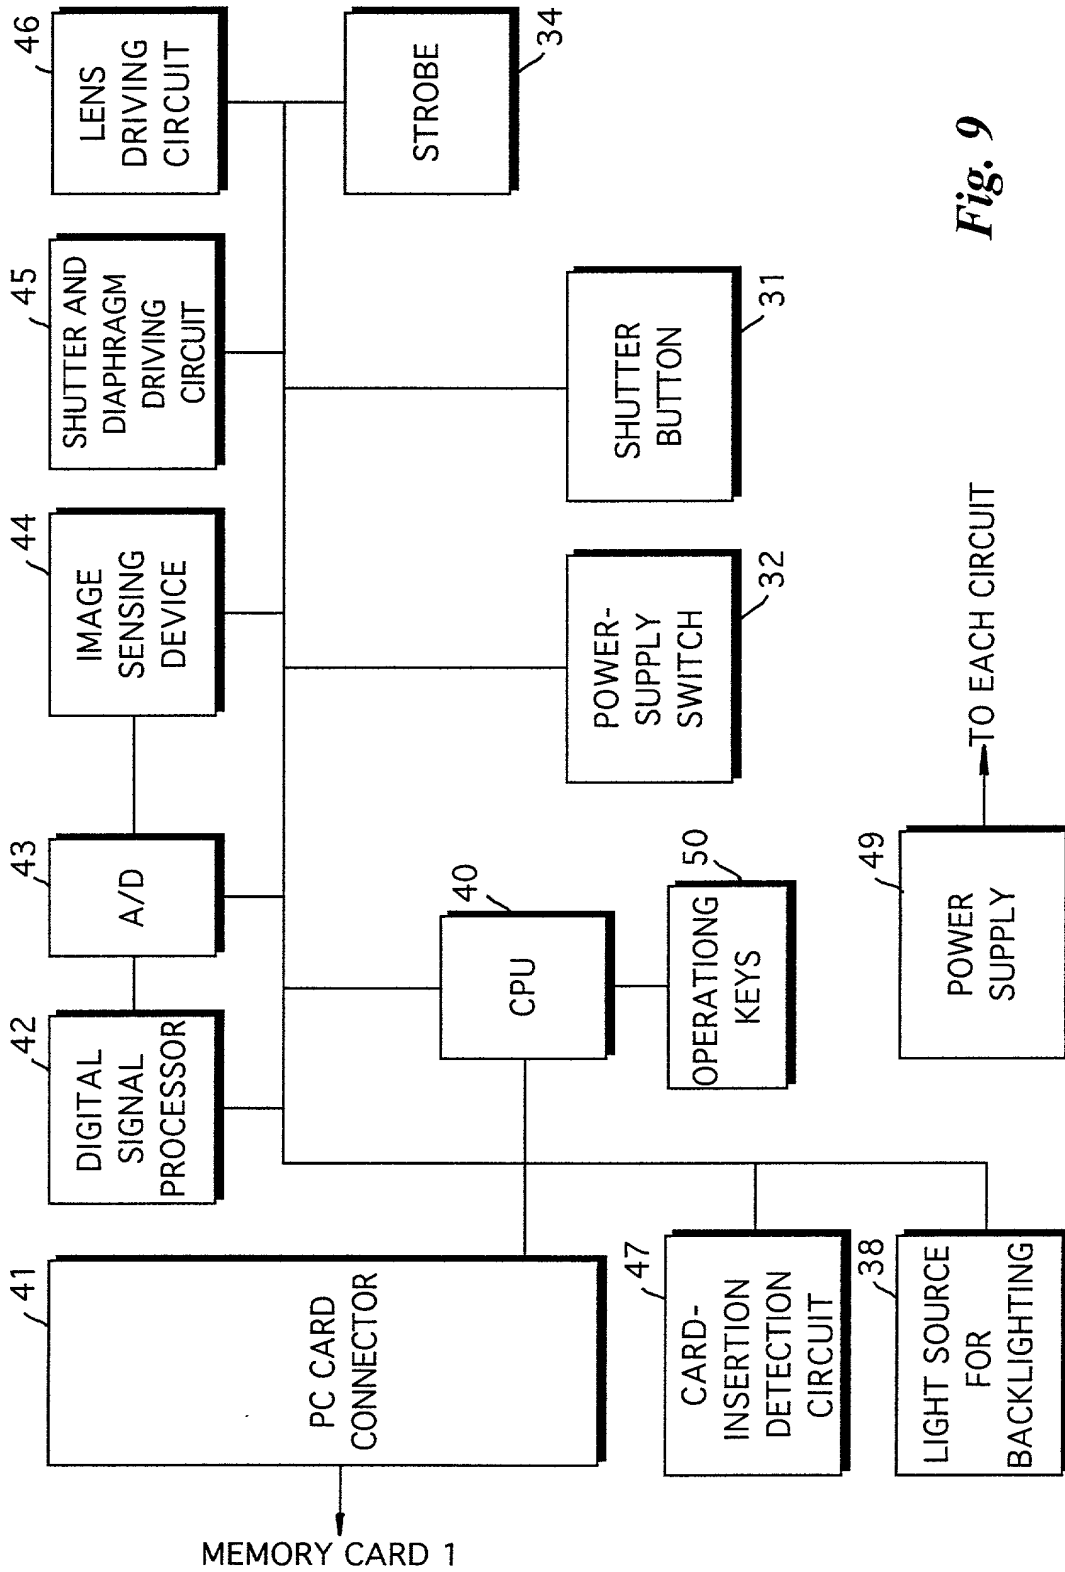


Fig. 9

*Fig. 10*

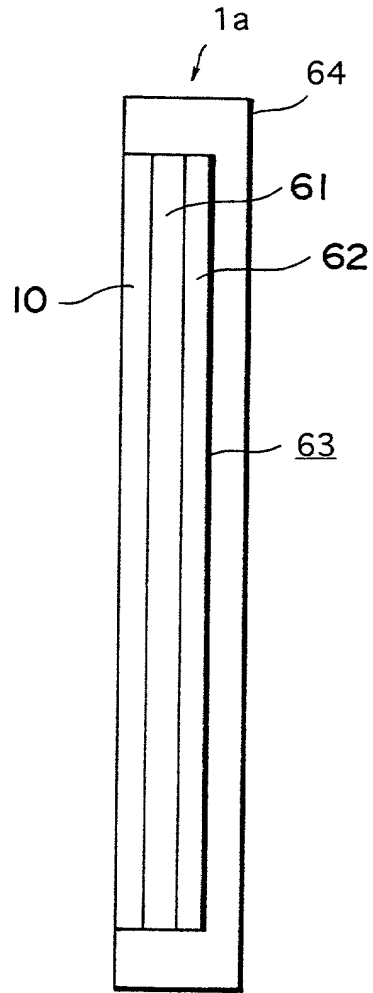

# BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

ATTORNEY DOCKET NO.  
905-222P

PLEASE NOTE:  
YOU MUST  
COMPLETE THE  
FOLLOWING:

## COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Insert Title: →

DIGITAL ELECTRONIC STILL CAMERA AND REMOVABLE MEMORY  
CARD THEREFOR

Fill in Appropriate  
Information —  
For Use →  
Without  
Specification  
Attached:

the specification of which is attached hereto. If not attached hereto,

the specification was filed on \_\_\_\_\_ as  
United States Application Number \_\_\_\_\_;  
and amended on \_\_\_\_\_ (if applicable); and/or  
the specification was filed on \_\_\_\_\_ as PCT  
International Application Number \_\_\_\_\_; and was  
amended under PCT Article 19 on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

### Prior Foreign Application(s)

### Priority Claimed

Insert Priority  
Information: →  
(if appropriate)

<u>10-260258</u> (Number)	<u>Japan</u> (Country)	<u>09/14/1998</u> (Month / Day / Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month / Day / Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month / Day / Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Month / Day / Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

Insert Provisional  
Application(s): →  
(if any)

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Insert Requested  
Information: →  
(if appropriate)

Country	Application Number	Date of Filing (Month / Day / Year)
_____	_____	_____
_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Insert Prior U.S.  
Application(s): →  
(if any)

_____ (Application Number)	_____ (Filing Date)	_____ (Status — patented, pending, abandoned)
_____ (Application Number)	_____ (Filing Date)	_____ (Status — patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. 21,066)	Terrell C. Birch	(Reg. No. 19,382)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	C. Joseph Faraci	(Reg. No. 32,350)
Donald J. Daley	(Reg. No. 34,313)	John W. Bailey	(Reg. No. 32,881)
John A. Castellano	(Reg. No. 35,094)		

Send Correspondence to: **BIRCH, STEWART, KOLASCH & BIRCH, LLP**  
P.O. Box 747 • Falls Church, Virginia 22040-0747  
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

**PLEASE NOTE:  
YOU MUST  
COMPLETE  
THE  
FOLLOWING:**



I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First or  
Sole Inventor  
Insert Name of  
Inventor →  
Insert Date This  
Document is Signed  
Insert Residence →  
Insert Citizenship  
Insert Post Office →  
Address  
Full Name of Second  
Inventor, if any  
see above

<b>GIVEN NAME</b>	<b>FAMILY NAME</b>	<b>INVENTOR'S SIGNATURE</b>	<b>DATE*</b>
Takeshi	MISAWA	<i>Takeshi Misawa</i>	09/01/1999
Residence (City, State & Country)			CITIZENSHIP
Asaka-shi, Saitama, Japan			Japanese
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
c/o FUJI PHOTO FILM CO., LTD. 11-46, Senzui 3-chome, Asaka-shi, Saitama 351-0024, Japan			
<b>GIVEN NAME</b>	<b>FAMILY NAME</b>	<b>INVENTOR'S SIGNATURE</b>	<b>DATE*</b>
Residence (City, State & Country)			CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
<b>GIVEN NAME</b>	<b>FAMILY NAME</b>	<b>INVENTOR'S SIGNATURE</b>	<b>DATE*</b>
Residence (City, State & Country)			CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
<b>GIVEN NAME</b>	<b>FAMILY NAME</b>	<b>INVENTOR'S SIGNATURE</b>	<b>DATE*</b>
Residence (City, State & Country)			CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
<b>GIVEN NAME</b>	<b>FAMILY NAME</b>	<b>INVENTOR'S SIGNATURE</b>	<b>DATE*</b>
Residence (City, State & Country)			CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			

Full Name of Third  
Inventor, if any  
see above

Full Name of Fourth  
Inventor, if any  
see above

Full Name of Fifth  
Inventor, if any  
see above